

CONVEYOR

Rigid and robust in construction to withstand tough condition


Screw-jack or auto-tensioning

Galvanized or stainless steel for sanitary

Ergonomically designed for safe and easy operation

Gear-motor or chain-driven

Mobile discharge car

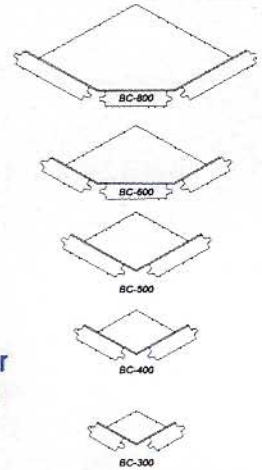

SPECIFICATIONS

Model	CONVEYING CAPACITIES (m ³ /h)				POWER REQUIRED: Depending on the material bulk density, moisture content and conveying length
	1.0m / sec	1.2m / sec	1.4m / sec	1.6m / sec	
MBC-300	19	24	30	35	Mobile discharge car c/w 0.75 kW motor for multiple discharge points
MBC-400	35	44	52	57	
MBC-500	66	79	93	107	
MBC-600	99	121	143	165	
MBC-800	209	253	297	341	

*All specifications shown on this catalog are subject to change without prior notice

AGRO-INDUSTRIAL SUPPLIES [M] SDN. BHD.

Lot: 25-28 & 32 Kawasan Perusahaan
Bandar Darulaman
06000 Jitra, Kedah Darul Aman
Malaysia

Tel: 604-917 9591
Fax: 604-917 9596
e-mail: info@agro-indus.com
website: www.agro-indus.com

(Company No.73881-V)

